

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 24 TOWNSHIP 14 RANGE 4

DATE: -9-3-02-- 8-15-07

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 7-27-99

IN. S.P.C. E ZONE NAD '83

NAME: 14042407

N: 487308.9401(m)

E: 67554.9231(m)

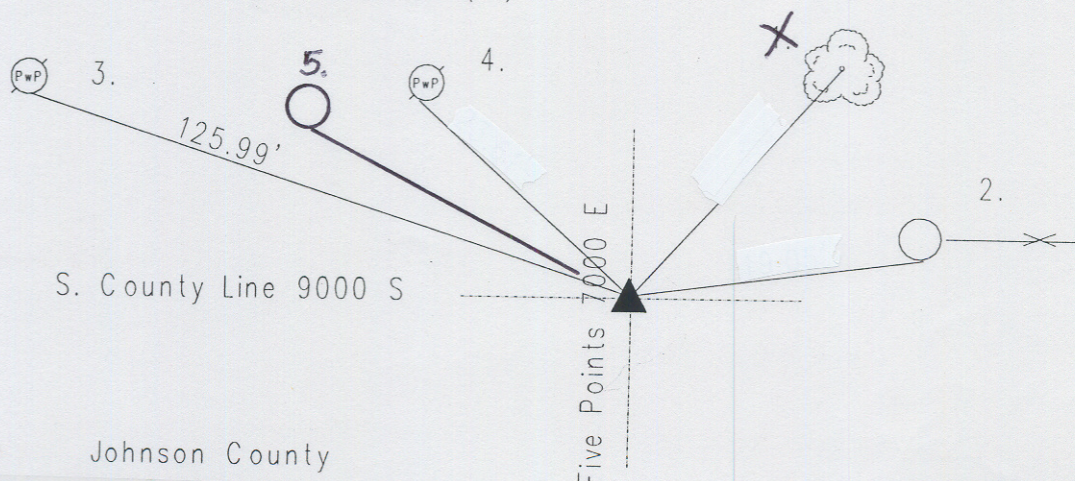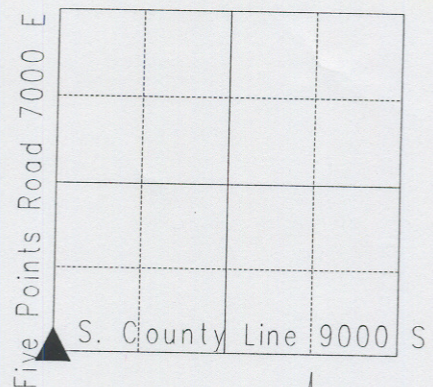

Corner originally set as post in 1820 by John Hendricks with the following witnesses: 24 "elm bearing south 12 degrees, thence west 26 links; and a 30" locust bearing north 30 degrees, thence east 25 links. (M.C. Atlas p.) A survey by D.B.Hasbrook on February 12, 1852 indicates no stone but the following witness: 14" hickory bearing north 88 degrees, thence east 35 links. (Franklin Legal Book p. 28) Corner referenced by Burres on 8/7/63 and called a R.R.spike. Corner referenced by Meland on 5/8/72 and called a R.R.spike. Corner referenced by Wilcoxon on 7/21/75 and called a R.R.spike. Corner referenced by Greene on 5/27/87 and called a R.R. spike. Corner referenced by Wilcoxon on 9/27/94 and called a R. R.spike. Corner referenced by Kiste on 7/27/99 and called a R.R.spike. Corner excavated by Wilcoxon on 10/23/02 and a R.R. spike was found 4" down. No other points were found. A #205 cast iron Harrison monument was set in position as the corner.

14042407

| REF. | DISTANCE | DESCRIPTION                                      |
|------|----------|--|
| 1.   | 17.33'   | <del>Railroad spike S twin hackberry 12"up</del> |
| 2.   | 19.62'   | Mag nail S fence post 42"up 8"up                 |
| 3.   | 125.99'  | PKnail S PwP#15-827 15"up                        |
| 4.   | 27.85'   | Mag nail w/brass washer SW PwP#16-827 8"up 4"up  |
| 5.   | 78.50'   | Mag nail w/bw S PwP no# 6"up                     |
|      |          |  |
|      |          |  |
|      |          |  |
|      |          |  |
|      |          |  |